


Data sheet


Float switch stainless steel design 152

Type: SSE...152...



Device with temperature sensor or temperature switch combinable,
see also level / temperature measurement technology combined

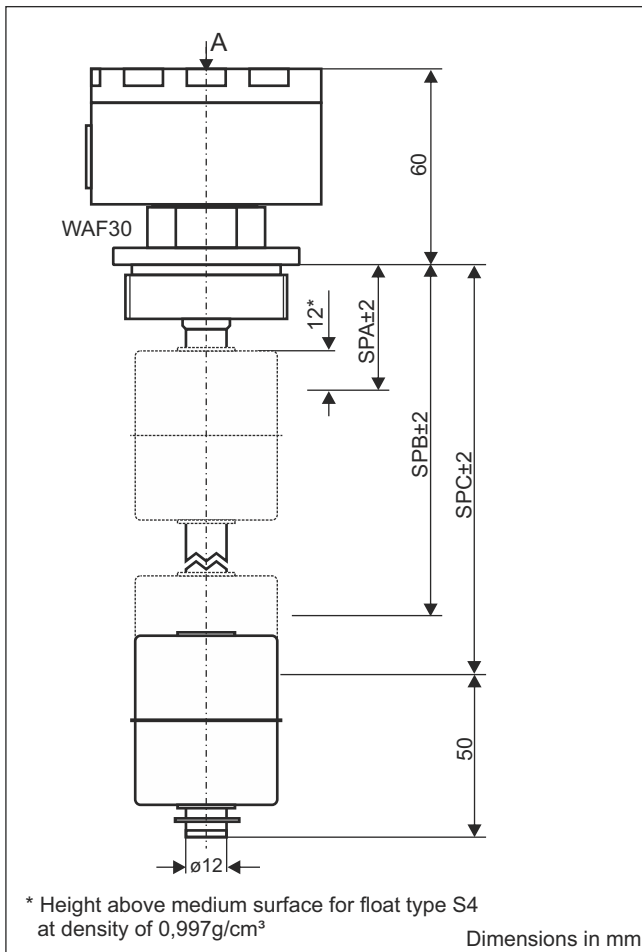

Order key

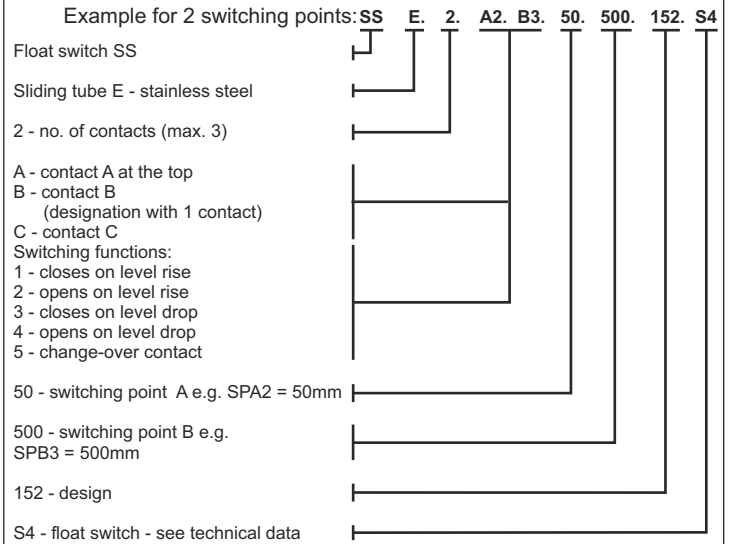

Example for terminal diagrams

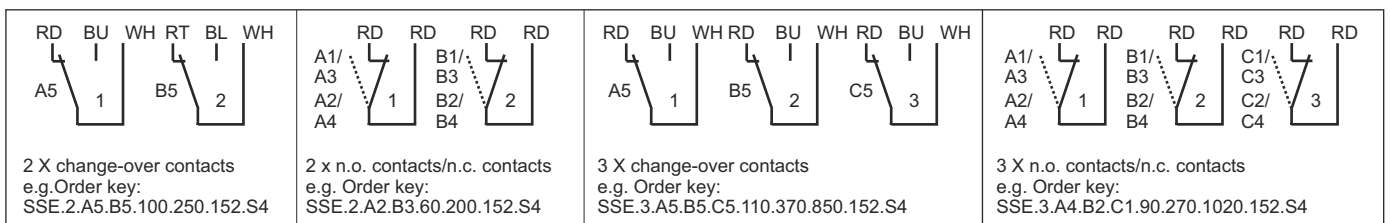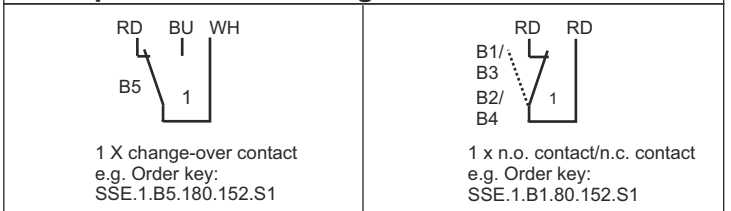

Technical data	
Connection:	terminal connection in the housing 1,5 mm ² cable entry at the housing M16x1,5 housing-material stainless steel 1.4571, colour grey
Mounting:	thread 1 1/2", material stainless steel 1.4571
Tube:	ø12mm, material stainless steel 1.4571
Float:	ø45x52mm, stainless steel 1.4571, type S4
Switching points:	reed contacts, max. 3x n.o. contacts/n.c. contacts or change-over contacts, further reed contacts on demand
Switching voltage, current, output:	230 VAC, 1A, 60VA
Pressure:	max. 25 bar
Operating temperature:	-20°C to 80°C in medium, -20°C to 70°C above mounting (with PP float) -20°C to 100°C in medium, -20°C to 70°C above mounting (with stainless steel float)
Protection rating:	IP 65

Subject to change